



Hinged P.T. Rail™

The Hinged model folds to store out of the way.

P.T. RAIL™

The P.T. Rail™ combines an exceptionally solid feel with an innovative offset rail design.

The P.T. Rail™ is a hinged or fixed support rail that promotes safe standing and transfers to and from a toilet. Can be mounted to wall or Floor Mast (see below). Provides rigid support where it is needed, on one or both sides of the toilet. Generous 1½" (3.8cm) diameter rail size for easy gripping. ADA compliant. Offset rail design prevents wrist strain when using the lower rail. Made of alloy steel with white baked enamel.

The Hinged model folds to store out of the way, yet pulls down in an instant when needed. Smooth "fluid feel" hinge holds its position wherever it is, without inadvertently falling down and causing injuries. Both Hinged and Fixed Rails measure 28" (71cm) from wall to tip of rail. Rail offset is 6" (15cm) vertical, 1½" (3.8cm) horizontal. The Fixed Wall Plate measures 5½" x 9" (14 x 23cm) with four ⅜" (9.6mm) fastener holes.

The P.T. Rail™ Floor Mast is a floor-mounted column that allows installation of the P.T. Rail™ in situations where wall mounting is not possible. Clamping system permits top rail height setting between 32" and 36" (81 and 91cm) from floor level. Both the hinged and fixed rails work with the P.T. Rail™ Floor Mast. The Floor Mast plate measures 4" x 6" (10 x 15cm) with four ⅜" (9.6mm) holes. Weight capacity is 350 lbs. (159kg).



P.T. Rail™ with Floor Mast

Hinged Rail 28" (71cm) length

- NC93030-01 Left
- NC93030-02 Right

Floor Mast (purchase rails separately)

NC93033

Fixed Rail 28" (71cm) length

- NC93031-01 Left
- NC93031-02 Right

PEENED GRAB BARS


Textured surface aids in gripping.



These stainless steel Peened Grab Bars mount 1½" (3.8cm) from the wall, meeting ADA requirements and government guidelines. Anti-slip textured grip area offers security. Weight capacity is 300 lbs. (136kg) when securely installed per the instructions. Hardware for installation is not included. Professional installation recommended.

Concealed Screw 1¼" (3.2cm) diameter bar

- NC34200-12 12" (30cm)
- NC34200-18 18" (46cm)
- NC34200-24 24" (61cm)
- NC34200-36 36" (91cm)
- NC34200-42 42" (107cm)
- NC34200-48 48" (122cm)

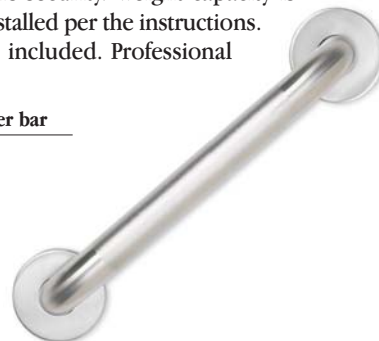

Grab Bars meet the Americans with Disabilities Act (ADA) specifications.



NORCO™ LOW PROFILE WALL MOUNTED GRAB BARS

Provide a secure handhold in the bathtub or shower.

These chrome-plated grab bars are made of 1¼" (3.2cm) diameter heavy-duty steel for strength and durability. Bars feature a textured, nonslip finish. Available in five straight lengths. Bars extend 1½" (3.8cm) away from the wall. Mounting hardware and instructions are included. Professional installation recommended.

- NC35805 12" (30cm)
- NC35806 16" (41cm)
- NC35807 18" (46cm)
- NC35808 24" (61cm)
- NC35809 32" (81cm)



SAFETY TREADS

Create a safe, nonslip surface.

Prevent slipping in a shower or tub with these easy-to-apply Safety Treads. Nonslip strips measure ¾" x 8½" (19mm x 22cm). Sold in a package of 20 strips.

NC28911 (20)



Flip-up tabs make installation and removal quick and easy.



NEW! SUCTION TUB AND SHOWER BARS
 Powerful dual suction cups adhere grab bars for added assistance in the tub or shower.

Easily attach these unique grab bars without having to hire a contractor for installation. Position on a smooth, clean, dry surface. To secure, hold in place and apply pressure while pushing down the tabs located at both ends. Release suction by flipping the tabs upwards for easy removal. Suction Tub and Shower Bars do not screw permanently into a wall, making them a perfect solution for renters or for use when traveling. Attach in the bath for better balance when exiting the tub. Can be used horizontally or vertically. Features a textured grip surface with nonslip grip rings for added security. Bars fit 4", 6" and 8" (10, 15 and 20cm) tiles.

- NC34235-12 12" (30cm)
- NC34235-16 16" (41cm)
- NC34235-24 24" (61cm)

GUARDIAN® TUB SAFETY HANDLE

Designed for safety and convenience.

Bi-level design features multiple hand-holds for security. Large, rubber pads protect tub surface from marring. Clamp adjusts from 2¾" to 6¼" (7.0 to 16cm) with the turn of a knob. Height above tub measures 13½" (34cm). Handle measures 7¼" (18cm) wide. Supports up to 250 lbs. (113kg).

NC28907



TUB SAFETY BARS

ADA-compliant tub safety bars.

These bars feature a sturdy, no-wobble design and different handle heights for easy gripping. Designed with textured grab areas for a secure hold. Bars clamp onto the tub wall for quick, tool-free installation and easy removal. Includes nonskid pads to prevent scratches on the tub surface. All three models are designed for use on bathtubs with walls from 3½" to 5¼" (8.9 to 13cm) thick and have an attractive glacier white, rust-proof finish. Supports up to 350 lbs. (159kg).

Made of molded plastic, the **Dual Tub Safety Bar** features two handles, 12" and 8" (30 and 20cm) high. Designed with textured grab areas that are shaped flat for better gripping.

Made of coated steel, the **MultiGrip Tub Safety Bar** offers grips at two heights, 7" low and 15" high (18 and 28cm). Clamp pads prevent tub from scratching (38 and 18cm).

Made of coated steel, the **High Profile Tub Safety Bar** provides a higher 15" (38cm) grab.

- NC34209 Dual Tub
- NC34207 MultiGrip Tub
- NC34206 High Profile Tub

Tub Safety Bars meet The Americans with Disabilities Act (ADA) specifications.



LUMEX™ TUB-GUARD® BATHTUB SAFETY RAIL

Ergonomic handle provides a safe and secure grip.

Help prevent accidents in the bathroom with Lumex™ Tub-Guard® Bathtub Safety Rails. These rails feature an ergonomically designed handle for a comfortable, safe grip. No tools are necessary for mounting. The clamping mechanism securely attaches the rails to the tub. Width of clamp adjusts from 2½" to 6½" (6.4 to 17 cm). The rustproof plastic body features a textured surface for a confident, nonslip grip. The **Standard** Safety Rail extends 12" (30cm) above the tub rim. The **Tall** Safety Rail is an easy-to-reach 16" (41cm) above the tub rim. The added height reduces the amount of bending required for taller people, making tub entry and exit safer and easier. Not recommended for use with fiberglass tubs. Supports up to 250 lbs. (113kg).

- NC28380 Standard
- NC28381 Tall



The **Standard** Safety Rail extends 12" (30cm) above the tub rim. The **Tall** Safety Rail is an easy-to-reach 16" (41cm) above the tub rim. The added height reduces the amount of bending required for taller people, making tub entry and exit safer and easier. Not recommended for use with fiberglass tubs. Supports up to 250 lbs. (113kg).

Stable shower chair allows add-on Armrests or Backrest as needed.



NEW! SWIFT SHOWER CHAIR/STOOL

Designed to ensure stability and safety.

Adapts to uneven floors and provides exceptional stability. Features a contoured, nonslip seat with drainage holes. A cutout for personal hygiene can be positioned at the front or back. Easily add on the optional armrests or open, perforated backrest. Legs adjust in height from 31½" to 37¾" (80 to 95 cm) using easy push-buttons. Seat measures 21¼" x 16⅝" (54 x 41 cm). Measures 21¼" (54 cm) wide. Simple assembly requires no tools. Made of durable, corrosion-free polypropylene and aluminum. Supports up to 287 lbs. (130 kg).

NC24591-1 Swift Shower Stool

NC24591-A Armrests

NC24591-B Backrest

Ideal for small spaces.



NEW! EDGE SHOWER STOOL

Triangular stool fits easily in shower corner.

Nonslip feet feature soft ferrules that ensure a stable grip on wet or dry surfaces. Adjust height of legs from 16½" to 22½" (42 to 57 cm) using easy push buttons. Weighs 5¾ lbs. (2.6 kg). Seat measures 17¾" (45 cm) wide. Total width measures 20½" (52 cm). Made of durable, corrosion-free polypropylene and aluminum. Supports up to 287 lbs. (130 kg).



NC24593



FOLDING SHOWER SEAT

Lightweight, durable seat folds for storage or travel.

Seat folds to just 2" (5.1 cm) deep and weighs only 4 lbs. (1.8 kg). Frame constructed of lightweight aluminum with nonslip rubber feet. Seat features easy-to-clean, quick-dry mesh material that resists mold and mildew. Built-in handles. Fits inside most standard tubs and showers. Seat measures 23" wide x 20" high (58 x 51 cm). Supports up to 250 lbs. (113 kg).



NC32220

Large Basket Organizer



Add-On Handles



Handheld Shower Attachment



Transfer Bench



Accessories not included.

Shower Chair

MODULAR BATH SAFETY ACCESSORIES

Attach easily to Tool-Free Shower Chair and Transfer Bench (right).



Large and Small Basket Organizers have drainage holes and are ideal for shampoos, lotions or soaps. The Handheld Shower Attachment directs spray towards floor. Add-On Handles provide a comfortable, ergonomically designed, nonslip grip with a flat, textured top. All accessories attach easily without tools and are dishwasher safe.

- NC34212-1 Large Basket Organizer
- NC34212-2 Small Basket Organizer
- NC34212-3 Add-On Handles
- NC34212-4 Handheld Shower Attachment

TOOL-FREE SHOWER CHAIR AND TRANSFER BENCH

Bath seats designed to accommodate modular add-on accessories (left).



These heavy duty seats can be customized with the accessories shown to the left. No tools are required for assembly or adjustment. The Tool-Free Shower Chair is designed as a seat that is contained within a bathtub or shower. Overall width is 22" (56cm). Leg height adjusts from 15" to 21" (38 to 53cm).

The Tool-Free Transfer Bench straddles the tub wall for easy transfers to the bath seat. Split-seat design allows shower curtain to tuck within the tub. Overall width is 33¼" (84cm). Leg height adjusts from 17" to 21" (43 to 53cm).

Large, comfortable seats measure 32½" x 19¼" (83 x 49cm). The chair backs are contoured for comfort and both have oversized seat pans with drainage holes. The nonslip rubber feet provide stability and protect the tub from nicks and scratches. The chair and bench both support up to 400 lbs. (181kg) and assemble without tools.

- NC34210 Shower Chair
- NC34211 Transfer Bench



CAREX® PORTABLE SHOWER BENCH

Convenient one-piece bench for the bath.

This Portable Shower Bench is ideal for persons with restricted mobility. Quality Carex® construction and design. Compact size is convenient for travel and storage. Rubber stops hold the bench in place firmly without scratching the surface of the bathtub. Measures 31" x 14¼" (79 x 36cm). Fits standard bathtubs from 19" to 28" (48 to 71cm) wide. Supports up to 300 lbs. (136kg).

NC28954

CAREX® ADJUSTABLE BATH AND SHOWER SEATS

A heavy-duty, easily adjustable bath and shower seat.

The sturdy Carex® Adjustable Bath and Shower Seats have large, easy-to-grasp handles and a raised edge at the rear of the seat for added security. Convenient built-in storage for handheld shower spray and soap dish accessories. Holes in the seat allow for proper drainage. Available with or without a back that is easy to remove and replace. Both models measure 25¼" wide and 19½" deep (64 and 50cm). Seat height adjusts from 17" to 22" (43 to 56cm) with the unique, patented, easy-to-use Exact Level™ System. Just turn the rubber feet until the seat reaches the desired height. Heavy-duty, all-plastic construction. No tools are needed for assembly. Seats safely support up to 300 lbs. (136kg).



Exact Level™ System adjusts height with a turn of the leg.

Bath and Shower Seat with Back



- NC28970 Seat
- NC28971 Seat with Back



Shower Bench with Back

Shower Bench without Back



Shower Bench with Back

Shower Bench

Benches feature blow-molded, high-density polyethylene plastic.

NORCO™ HEAVY DUTY/BARIATRIC SHOWER BENCHES

Durable benches support up to 500 pounds.

Heavy-duty frame is constructed of 1" (2.5cm) aluminum tubing and features strong cross braces and legs for added stability. The seat measures 17¼" wide x 16" deep (44 x 41cm). Seat height adjusts from 17" to 19" high (43 to 48cm). Width at the base is 18½" x 19" (47 x 48cm). Overall height measures 30½" to 32½" (77 to 83cm). No tools required for assembly. Lifetime warranty on the frame. Benches support up to 500 lbs. (227kg).

- NC28981 Bench
- NC28982 Bench with back

NORCO™ SHOWER BENCHES

Secure comfort in the bath or shower.

Anodized aluminum legs are rubber-tipped and angled outward to help prevent accidental slipping and to protect the tub. Bench height adjusts from 14" to 18" (36 to 46cm). Benches measure 12" x 20" (30 x 51cm). Back measures 16" x 8" (41 x 20cm). Maximum width at base measures 18¾" (48cm). Benches support up to 300 lbs. (136kg).

- NC87100 Bench with Back
- NC87101 Bench



Folds for easy compact storage.

Seat can be tilted.

FOLDING SHOWER SEAT

Features versatile seat angle and height adjustments.

Safe, stable shower seat folds easily for compact storage. Seat angle inclines forward, making it ideal for people with stiff knees or hips. The seat has a cut-out for personal hygiene. Backrest and seat are made of molded polypropylene with an anti-slip texture on the seat. Frame is made of epoxy polyester-lacquered steel tubing and measures 29" to 36" high x 23" wide x 17½" deep (74 to 91 x 58 x 44cm). Seat height adjusts from 17½" to 23½" (44 to 60cm). Clean with regular household cleansers and disinfectants. Weighs 14½ lbs. (6.6kg). Supports up to 285 lbs. (129kg).

NC24590



Durable, anodized aluminum construction.

Rear casters lock for safety.

NORCO™ ROLLING SHOWER TRANSPORT CHAIR

Move chair into desired position and safely lock rolling casters.

This mobile shower chair features four 4" (10cm) swivel casters with rear caster locks for safety. Anodized aluminum construction prevents rusting. The nylon backrest and plastic seat are easy to clean. The seat measures 16" deep x 14½" wide (41 x 37cm). Seat height from the floor measures 18" (46cm). Overall height from the floor to the top of backrest measures 34½" (88cm). The inside width between chair arms measures 19" (48cm). Maximum width at base measures 22½" (57cm). Supports up to 250 lbs. (113kg).

NC28921



NORCO™ TUB TRANSFER BENCH

Stabilize tub transfers.

Features a lightweight, anodized aluminum frame, a textured, molded backrest and a non-slip seating surface with drainage holes. Backrest attaches on either side of the bench for bathtub entry from the left or right side. Height adjusts from 17" to 22" (43 to 56cm) in 1" (2.5cm) increments. Bench overall measures 20½" deep x 30" (52 x 76cm) wide. Overall width at base measures 31" (79cm). No tools are required for assembly. Supports up to 250 lbs. (113kg).

NC28923



CAREX® BATH TRANSFER BENCH

Enter and exit the tub safely with this adjustable transfer bench.

The Carex® Bath Transfer Bench is lightweight and rustproof. A safe, convenient means for tub entry, this bench is ideal for individuals who need to bathe while seated. Features a supportive seat back, a large, easy-to-grip handle and a raised edge at the rear of the seat for added security. This bench also features convenient built-in storage for a handheld shower spray and soap accessories. Holes in the seat provide drainage. Designed for bathtub entry from

The Exact Level™ System allows easy height adjustments. Just turn the rubber feet until the seat reaches the desired height.



either the left or right side. Unique, patented Exact Level™ System allows easy for adjustment of seat height from 18½" to 23½" (47 to 60cm). The overall width measures 35" (89cm). Bench supports up to 300 lbs. (136kg).

NC28968



Economy Vinyl Transfer Seat



Economy Plastic Transfer Seat

ECONOMY UNIVERSAL TRANSFER SEATS

Two options provide comfort and safety at an economical price.

Available with either plastic or padded vinyl-foam seats. The **Economy Plastic Transfer Seat** has a nonslip textured surface and drainage holes. Seat height adjusts from 15½" to 20½" (39 to 52cm). The waterproof **Economy Vinyl Transfer Seat** has a thick, high-density foam seat for comfort. Seat height adjusts in ½" (13mm) increments from 16¾" to 21¾"



Legs with suction cups

(43 to 55cm) tall. Fits tubs from 11" to 17" (28 to 43cm) deep. Use the optional legs with suction cups to increase stability and prevent movement in the tub. Both benches support up to 300 lbs. (136kg).

- NC28949-1 Vinyl Seat
- NC28949-2 Plastic Seat
- NC28949-3 Legs with Suction Cups (2)



Hand held shower sold separately.

HEAVY DUTY TRANSFER BENCH

Tested to support up to 400 pounds.

This transfer bench allows easy entry into the bath with its one-piece textured top. Convenient built-in shower head holder. Rustproof aluminum frame. Bench seat height adjusts from 19½" to 23¼" (50 to 60cm). Seat measures 27" x 16¾" (69 x 43cm). Optional suction cups provide a safe, nonslip hold on smooth surfaces. Supports up to 400 lbs. (181kg).

- NC24599 Transfer Bench
- NC24599-1 Suction cups (2)

Note: All bath chairs can be cleaned with household cleansers and disinfectants.

PADDED TRANSFER BENCH WITH COMMODE OPENING

Suction cups grip securely for safer transfers.

Features a side rail for extra support and push-button height adjustment that raises the seat from 17½" to 22" (44 to 56cm). Comfortable, vinyl-covered foam cushions are secured to an aluminum frame. The 8" (20cm) diameter commode opening allows for improved personal hygiene. Clearance beneath frame is 14" to 18½" (36 to 47cm). Overall width is 29¼" (74cm), overall depth is 16¾" (43cm). Assembles for bathtub entry from either the left or right side. Replacement suction cups and extension legs sold separately. Supports up to 300 lbs. (136kg).




- NC28955 Transfer Bench
- NC28955-1 Replacement Cups
- NC28955-2 Extension Legs

CAREX® ADJUSTABLE TRANSFER BENCH

Provides safer, easier access getting in and out of tubs.

The sturdy, all-composite plastic Adjustable Transfer Bench helps people with weakness or poor mobility to enter or exit the tub safely. Rubber feet provide added security. Seat measures 30" wide x 19" deep (76 x 48cm). Backrest measures 23" (58cm) wide and is 14½" (37cm) from seat to top. Seat height adjusts from 18½" to 23½" (47 to 60cm) using the patented Exact Level™ System. Just turn the rubber feet until seat reaches the desired height. Can be adapted easily for bathtub entry from either side. No tools are needed for assembly. Supports up to 400 lbs. (181kg).

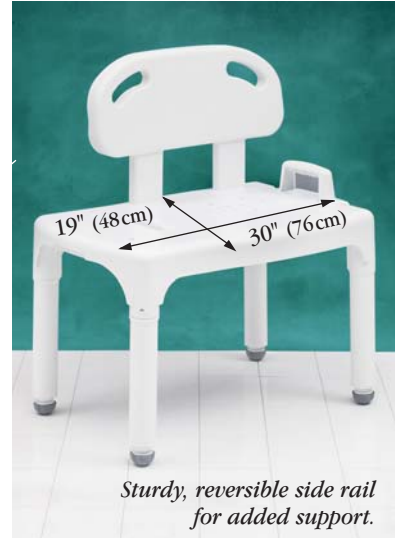

NC28967



Toilet Safety Frame



Shower Seat



Toilet Safety Frame



Shower Seat

ECONOMY COATED COMMODE

An all-in-one commode, bath seat and raised toilet seat.

This coated commode unit can be used in three different ways: as a toilet safety frame with rails, as a shower seat, or as a free-standing commode. Remove the pail and add the splash guard for use as a toilet safety frame. Use without the pail and splash guard as a shower seat. With the pail, it acts as a free-standing commode.

Clean with household cleansers. Durable, gray coated steel frame has overall width of 23½" (60cm). Width between arms measures 17½" (44cm). Seat measures 14" wide x 15" deep (36 x 38cm). Seat height is adjustable in 1" (2.5cm) increments, from 15½" to 23½" (39 to 60cm). Splash guard and pail are included. Supports up to 300 lbs. (136kg).

NC24596



GUARDIAN® 3-IN-1 HEAVY DUTY COMMODE

Versatile commode features a heavy-duty frame for extra support.

Use as a bedside commode, a shower chair or an over-the-toilet safety frame. Nonskid feet and handles with foam grips add security when sitting and rising. Constructed of reinforced steel braces with a gray, powder-coated surface. Seat attachment is secured by ¼" (6.4mm) steel bolts. Clean with household cleansers. The removable, contoured commode bucket features a plastic handle and rim for secure handling. Measures 18" long x 24" (46 x 61cm) wide, and adjusts from 18" to 22" (46 to 56cm) in height with an easy-to-use push button. Seat depth measures 16" (41cm). Width between arms measures 21" (53cm). Overall width measures 23¾" (60cm). Supports up to 400 lbs. (181kg).

NC24555



NORCO™ HEAVY DUTY/BARIATRIC DROP ARM COMMODE

Supports up to 1000 pounds.


Drop arm commodes feature welded steel construction for exceptional strength. Drop arm allows easy transfers. The seat has a polyurethane molded design for comfort and a larger opening. Available in two models: the 26" (66cm) wide model supports up to 800 lbs. (363kg) and the 36" (91cm) wide model supports up to 1000 lbs. (454kg). The seat height for both models measures 18½" (47cm) from the floor and the seat depth measures 21" (53cm). Seat opening measures 10" wide x 13¼" (25 x 34cm) deep. Clean with household cleansers and disinfectants. Lifetime warranty on frame.

Width

NC28983	26" (66cm)
NC28984	36" (91cm)



The 26" wide model (left) supports up to 800 lbs.(363kg) and the 36" model (above) supports up to 1000 lbs.(454kg).



Lever allows easy operation of drop arm.

DROP ARM COMMODES

Easy-to-operate drop arm mechanism facilitates lateral transfers.

These convenient commodes feature a side arm that drops out of the way for easy transfers from a bed or wheelchair. Durable all-steel frame with powder-coating is warm to the touch. The plastic seat is easy to clean and will not chip or crack. Pail and lid are included and lift out for easy cleaning. Seat can be angled to reduce bending by the user. The **Norco™ Standard Drop Arm Commode** measures 25" high x 21½" wide x 21" deep (64 x 55 x 53cm). The seat measures 15" wide x 16" deep (38 x 41cm). Seat height adjusts from 14" to 19½" (36 to 50cm). Weighs 15½ lbs. (7.0kg) and supports up to 250 lbs. (113kg). Clean with regular household cleansers and disinfectants.

The **X-Large Drop Arm Commode** has a molded platform seat that extends the length and width of the commode. Measures 32" high x 31" wide x 21" deep (81 x 79 x 53cm). The seat height adjusts from 19½" to 23½" (50 to 60cm) in 1" (2.5cm) increments. Seat depth measures 18½" (47cm). Width between arms measures 25½" (65cm). Weighs 25 lbs. (11kg) and supports up to 400 lbs. (181kg). Clean commode with household cleansers and disinfectants.

NC28925	Standard
NC25002	X-Large



X-Large Drop Arm Commode

Norco™ Standard Drop Arm Commode

Special spout helps prevent spills.



Men's Clear

Women's Regular

SPIL-PRUF® URINALS

Unique design helps prevent leaks.

Specially designed spout prevents spills and leaks once urine is in the storage container. Helps reduce odor problems. Holds 500cc of liquid. Autoclave at 250° F (121°C). Works best when used in a sitting position. Perfect for bedside use. May be hung on a walker. Complete instructions are included. Available in women's or men's, regular or clear models. Replacement O-ring gaskets sold separately in packages of 6.

- NC28714 Men's Regular
- NC28714-1 Women's Regular
- NC28711 Men's Clear
- NC28712 Women's Clear
- NC28714-6 O-ring Gasket (6)



NORCO™ ADJUSTABLE TOILET SEAT

Raised seat adjusts to fit most toilet bowls.

This adjustable seat features a unique locking system that consists of five rubber-tipped, rustproof aluminum brackets. The brackets can be reversed to fit a wide variety of bowls, excluding elongated seats. Toilet seat measures 16" deep x 15" wide (41 x 38cm). Opening measures 8½" wide x 9½" deep (22 x 24cm). Height adjusts from 3" to 6" (7.6 to 15cm) in 1" (2.5cm) increments. Removable plastic splash guard. Made of blow-molded plastic. Weight capacity is 250 lbs. (113kg).

NC28920



RAISED TOILET SEAT WITH ARMS

The first raised seat with molded-in arms.

These elevated seats feature molded-in arms for security and support. Adds 3½" (8.9cm) to toilet seat height. Wider front opening slopes inward to guard against spillage. The width between the arms is 19" (48cm), with a 21" (53cm) exterior arm width. Extra-long screws attach the raised seat and toilet seat to the bowl (hardware included). Made of durable, easy-to-clean plastic. Weight capacity is 300 lbs. (136kg). Limited lifetime warranty.

- NC28966-2 Standard
- NC28966-1 Elongated



LUMEX® TOILET SAFETY FRAME

Offers safety and support for persons with limited grasp.

The Lumex® Toilet Safety Frame has a unique arm design that helps add confidence and increase balance when rising and sitting. Built-up handles are great for persons with arthritis or weak grasps. Attaches quickly and easily to most toilets. Clean with household cleansers. Arm height adjusts from 26" to 30" (66 to 76cm). Width between the arms adjusts from 17" to 20" (43 to 51cm). Weight capacity is 250 lbs. (113kg).

NC28950



TOILEVATOR®

Adds height at the base of the toilet instead of the seat for an unobtrusive look.

The aesthetically pleasing Toilevator® adds 3½" (8.9cm) to the height of standard 14" to 15" (36 to 38cm) tall toilets with round or elongated bowls. The extra height is added between the floor and the toilet's base, so that the original seat remains in use. Includes instructions and everything needed for easy installation. A safe, economical and easy-to-clean alternative to raised toilet seats. Measures 23" long x 11½" wide x 3½" tall (58 x 29 x 8.9cm). Total weight capacity is 500 lbs. (227kg).

NC29010



Turn dial secures seat to the toilet.

GUARDIAN® LOCKING ELEVATED TOILET SEAT WITH ARMS

Larger seat with raised arms is ideal for elongated toilets.

This locking seat adds 5" (13cm) to the height of a toilet seat. Turn dial fits and secures the seat to the toilet rim. Raised armrests add security and are padded with wraparound foam for comfort. Seat measures 16" x 14" (41 x 36cm). and can be used on an elongated toilet. Made of easy-to-clean composite resin. Overall dimensions (including arms): 20½" x wide x 18" deep x 11" tall (52 x 46 x 28cm). Weight capacity is 250 lbs. (113kg).

NC28930



GUARDIAN® TOILET SAFETY FRAME

Offers secure support while getting up or sitting down.

This easy-to-clean toilet safety frame features closed-cell foam armrests that provide a comfortable, sure grip. Height of the aluminum frame adjusts from 26" to 31" (66 to 79cm) to accommodate elevated or standard toilets. Adjustable bracket mounts the frame onto the toilet bowl securely. Armrest width adjusts from 18" to 24" (46 to 61cm). Overall depth of frame measures 16¾" (43cm). Weight capacity is 250 lbs. (113kg). Clean with household cleansers and disinfectants.

NC28953

LOCKING ELEVATED TOILET SEAT

Raised toilet seat locks securely, and can be removed and reattached easily.



This elevated seat fits most round or elongated toilet bowls. Raises seat height 4½" (11cm). The locking bracket remains in place, making seat removal or reattachment easy. The **Add-On Handles** can be attached easily and provide a comfortable, non-slip grip. Weight capacity is 350 lbs. (159kg). Clean with household cleansers and disinfectants.

NC34214 Toilet Seat
NC34212-3 Handles



Locking bracket remains in place for easy seat removal and reattachment.



Add-On Handles



Locking Elevated Toilet Seat



TOILET SAFETY RAIL

Leaves the area around the base accessible and free of obstructions.



Two 9" (23cm) high armrests and a stable mounting platform offer maximum security. Attractive rustproof frame is designed to attach directly to the toilet. Overall width measures 23¾" (60cm). Space between the handles measures 20" (51cm). Clean with household cleansers and disinfectants

NC34215

UPLIFT™ COMMODE ASSIST

Restores independence for people who have difficulty moving from sitting to standing while using the toilet.

The versatile and sturdy Uplift™ Commode Assist can be used in any room as a bedside commode and converted easily for use on a toilet. For safety, it automatically locks into position when fully depressed. With or without assistance, the Uplift™ Commode Assist absorbs 80% of the person's weight to gently lower to a sitting position and smoothly lift to a standing position. Lifts only as needed, allowing the user to maintain muscular strength. The commode bucket slides out for easy cleaning. Includes splash guard and lid. Removable back rest allows for easy positioning over the toilet. Base measures 20½" x 25¾" (52 x 65cm). Seat measures 16½" x 16½" (42 x 42cm) and seat height adjusts from 17" to 23" (43 to 58cm). The lift raises the seat 20° up to 10" (25cm). Coated steel frame supports 80 to 220 lbs. (35 to 100kg). Clean with household disinfectants.

NC82007



To stand, the user presses down on the seat release lever. This lever locks, freeing both hands for stability.



The Uplift™ Commode Assist lifts only as needed, allowing users to maintain muscular strength.



Cover and seat may be raised independently.

HINGED ELEVATED TOILET SEAT

Increase toilet seat height while maintaining standard seat and cover.

The Hinged Elevated Toilet Seat adds 3" (7.6cm) of height to the toilet. Ideal for persons who have trouble sitting down and getting up from a standard toilet. Constructed of two parts that are hinged together for the convenience of raising the seat in the same manner as a standard toilet seat.

Install using your own toilet seat and cover. Can be used with the the Lumex® Toilet Safety Frame (NC28950) shown on page 160. U.S. Patent #5,251,338. Weight capacity is 250 lbs. (113kg).

- NC25050 Standard
- NC25051 Elongated



ELEVATED TOILET SAFETY SEAT

Fits directly on the toilet seat.



Simple to install and remove, this toilet seat adds 5" (13cm) of height to the toilet. Made of durable plastic. Weight capacity is 350 lbs. (159kg). Fits most round or elongated toilets. ADA compliant.

NC34216



Meets The Americans with Disabilities Act (ADA) specifications.



Available with either left or right side slope.

TALL-ETTE® III ARTHRO® WITH LOK-IN-EL® BRACKET

For one-sided lower extremity injuries.

The Tall-ette® III Arthro® raises the toilet seat 4" (10cm) with a gentle slope on either the left or right side for lower extremity disability. Ideal when less than 90° hip flexion is required. Made of easy-to-clean polyethylene plastic. Weight capacity is 250 lbs. (113kg). Not for use on elongated toilets.

The Lok-In-El® Bracket easily slides under the hinge pin of the existing toilet seat while two large posts mate to the raised toilet seat, providing a secure fit.

- NC28934 Left
- NC28935 Right

Other Tall-ette® seats are available. Call for information or visit www.ncmedical.com.



Lok-In-El® Bracket



Bumpers prevent seat from shifting.

NEW! BIG JOHN TOILET SEAT™

Ideal for plus-size users.

Big John can be used by anyone who wants a more comfortable toilet seat. Highest-grade plastic is resistant to stains and chemicals. Seat is 2" (5.1cm) higher than standard toilet seats. Seat measures 19" x 19" (48 x 48cm). Inside dimensions are 11½" (29cm) front to back and 8¾" (22cm) side to side. Attaches with durable stainless steel hinges and synthetic rubber bumpers that grip the porcelain to prevent the seat from shifting. Weight capacity is rated at over 1200 lbs. (544kg). Fits standard round or elongated toilets. Available with or without front opening. White.

- NC34220-1 Without front opening
- NC34220-2 With front opening



Meets The Americans with Disabilities Act (ADA) specifications.



ECONOMY ELEVATED TOILET SEAT

Our best value in raised seats.

One-piece molded seat has a tapered flange that sits directly on the porcelain bowl. Adds 4¾" (12cm) to seat height. Attaches without tools or clamps. Fits seat openings measuring from 10" to 12" (25 to 31cm), or slightly larger. Durable, polyethylene plastic is easy to clean. Weight capacity is 250 lbs. (113kg). Weighs 3 lbs. (1.4kg). Not for use on Lowboy or elongated toilets.

NC28945